



Slim linear LED. Lamp for small and medium industrial machines. Solid anodized aluminum structure with protective glass 4mm depth. High-efficiency 6W multi-chip LED. I.D.S. technology for 24VDC connection. IP69K degree of protection. Two versions available 13-34W. 24VDC power supply.

Electrical features

Power supply	24 Vdc
LED driver 700mA dc cost	integrato
IEC class	III
Degree of protection	IP69K
Connection	cable /conn M12 4P(Male) only external version



Optical and mechanical features

LED type	mini power LED
LED lifetime	50 000 h
Brightness	wide beam 120°
Light color	5000K Ra75
Structure	Anodized aluminum
Covering	tempered glass 4mm
Colore lampada	Aluminum
Operating temperatur	-20 +55°C
Fastening	side plates TABIT.FX02
Power cable	H05RN-F Neopren 2x0,75mmq: brown (+24Vdc) – blue (-24Vdc)

Model	Power supply	N° LED	Current	Watt	Light color	Weight
TABIT.2.50	24Vdc	36	0,6 A	13 W	5000 K	0,75 Kg ~
TABIT.5.50	24Vdc	90	1,5 A	34 W	5000 K	1,65 Kg ~

DIMENSIONS (all values in millimeter)

FASTENING ACCESSORIES TABIT.FX02

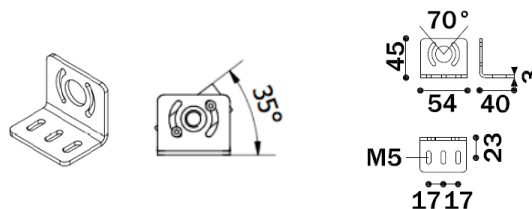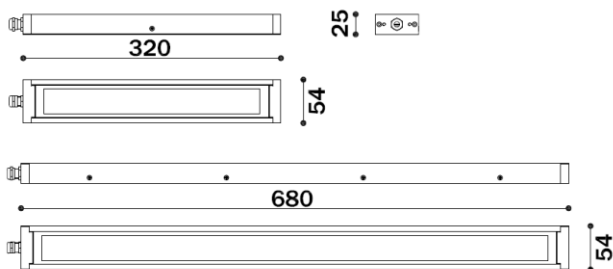

TABIT.FX02 Side stainless steel plates (to be ordered separately)